

DATA SHEET FOR LUNDS STANDARD SINGLE PAM WALL MOUNTED BRACKET Part No. 281105-250





LUND BROS. & Co. Ltd.

BROOKSIDE AVENUE • RUSTINGTON
WEST SUSSEX • BN16 3LF
TEL. 01903 784242 • FAX. 01903 787126
EMAIL sales@lunds.co.uk
WEB. www.lunds.co.uk

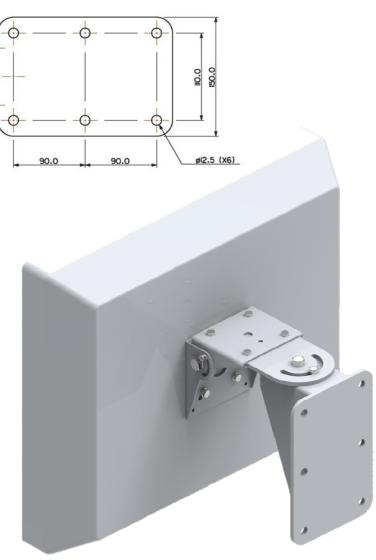

The Single Passenger Awareness Monitor Wall Bracket allows a Metronet type PAM to be securely fixed to a wall or any vertical surface. This bracket configuration will require the addition of our VESA 100 or PAM Adaptor Bracket Part No. 281105-200 (shown above) that can be purchased separately.

It allows a full 45 degrees of lateral movement and a viewing angle of around 30 degrees.

The bracket assembly weighs approx. 3.2 Kilograms and is attached with suitable fixings. We would suggest bright zinc plated 8.8 grade fixings in all cases and suitable single coil or Shakeproof washers.

Recommended wall mounting is by M12 Kemfix Bolts or equivalent.

The base material is 6mm thick steel to BS EN 10029 : 1991/BS EN 10051 : 1992 and the welding is to BSEN287 & 288.

The finish is a zinc & colour plating operation and a DuPont ALESTA or equivalent Powder Paint to either RAL 9006 (White) or NCS 6502-R (Dark Grey) or nearest commercial equivalent. This complies with London Undergrounds No-Smoke, Zero Halogen fire test policy.